

AFTERCARE INSTRUCTIONS

This product has a durable lacquered finish. However, it should still be treated with care to ensure its longevity.

Excessive exposure to water will deteriorate the furniture. Clean regularly with a soft damp cloth.

Do not scrub or use abrasive cleaning materials. Use a wax free polish if one must be used.

Do not use bleach or cleaners containing bleach. When cleaning the ceramic pan with cleaning products containing bleach, do not close the toilet seat to avoid fumes possibly discolouring the lacquered finish.

Clean the hinges regularly with a soft, damp cloth and soapy water.

Do not stand on the lid or toilet seat; this may damage it.

CUSTOMER SERVICE


t: +44(0)208 686 5100
e: technical@saneux.com

4 Imperial Way
Croydon CR0 4RR

www.saneux.com

SOFIA

INSTALLATION INSTRUCTIONS

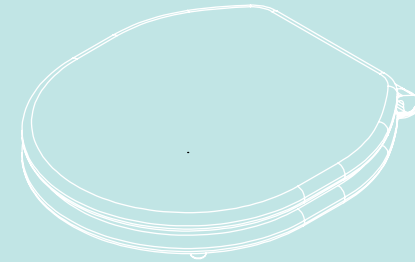

SOTSO1

saneux

Seat Installation.

1. Make sure that the seat hinges are in the right location by placing the seat on the pan and checking that the fixing holes align with the hinge base holes.
2. If the hinge bases need to be adjusted, simply loosen the screw on the underside of the hinge base, rotate the hinge base and tighten the screw again.
3. Place the anchor fixing inside each seat hole on the pan.
4. Without disassembling the seat hinges, lift the base cover and rotate so it's out of the way.
5. Place the seat on the pan and drive the fixing screw through the small plate and hinge base, into the anchor fixing.
6. Tighten the screw slightly and check the alignment of the seat against the pan.
7. Once you are satisfied with the position of the seat, drive the fixing screw further into the anchor, ensuring a very tight fit.

