
Aftercare Instructions

This product has a high quality, durable finish which in order to preserve, should be treated with care.

Clean with warm soapy water and a soft damp cloth only.

Cleaning products, including non-scratch ones could damage the finish surface.

Water Flow Rate

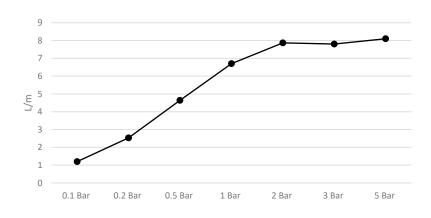

Customer Services

t: +44(0)208 686 5100 e: technical@saneux.com

4 Imperial Way Croydon CRO 4RR




www.saneux.com

TEMPUS

TE430

Wall Mounted 3 Set Basin Mixer





Installation

Please note if installing in an enclosed environment, access should be left for servicing and maintenance.

- 1. Before making any inlet pipe connections, all supply pipes must be thoroughly flushed to remove debris. Failure to do so could result in damage or low flow from the mixer unit.
- 2. Refer to the components diagram and ensure all components are present before installation.
- 3. Ensure the pipework is correctly aranged to suit the position of the hot/cold inlets.
- 4. Fit the valve to the internal wall by drilling into the wall, inserting the provided wall plugs and scew in the fixing screws, as shown in the diagram.
- 5. Secure the spout to the valve by screwing onto the thread, as shown in the component diagram.
- 4. Fit the hot and cold handles to their respective cartridges and fix in place with the grub screw. Make sure to fit the handle for the hot water on the left. DO NOT overtighten as this may damage the basin.
- 5. Fully open the mixer on both hot & cold sides and allow the water to run for approximately one minute to further flush the system.
- 6. Check all connections and ensure there are no leaks.

