

## AFTERCARE INSTRUCTIONS


These products have a high quality, durable finish which in order to preserve, should be treated with care.

Clean with warm soapy water and a soft damp cloth only.

Cleaning products, including non-scratch ones could damage the finish.

Maintain your brassware by wiping dry after use, removing water drops and soap deposits

### Water Flow Rate:

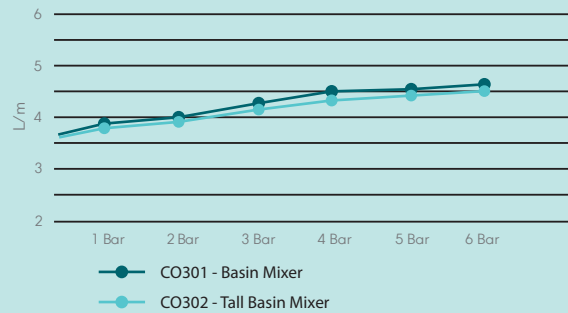

## CUSTOMER SERVICE


t: +44(0)208 686 5100  
e: [technical@saneux.com](mailto:technical@saneux.com)

Iain Stewart Centre, Beehive Ring Road,  
Gatwick, RH6 0PB

[www.saneux.com](http://www.saneux.com)

# COS

## INSTALLATION INSTRUCTIONS

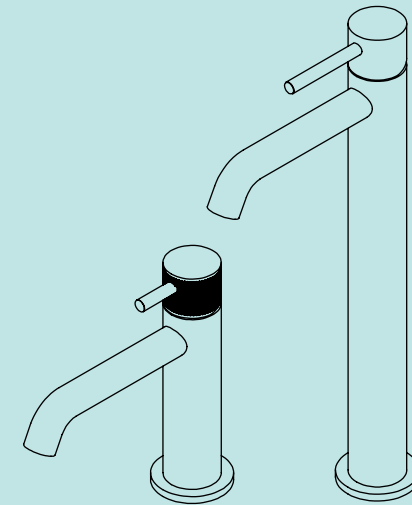

CO301, CO302  
Classic / Knurled / Fluted

Classic & Tall Basin Mixer

saneux

## INSTALLATION

**BEFORE:** Check that you have all necessary components, including the Basin mixer handle and fixings. Refer to the component diagram.

Please note if installing in an enclosed environment, access should be left for servicing and maintenance.

1. Before making any inlet pipe connections, all supply pipes must be thoroughly flushed to remove debris. Failure to do so could result in damage or low flow from the mixer unit.
2. Place the mixer on the basin surface and fit the flexible hoses to the basin mixer using an appropriate spanner, make sure the hoses are not over tightened.
3. Fit the washer and screw the nut to the basin mixer body. Remember to install the rubber O-ring between the basin mixer body and the basin surface.
4. Using the grub screw and allen key provided to assemble the chosen basin mixer handle.
5. Connect the water supply to the flexible hoses. Hot supply should always be connected to the left hose.
6. Fully open the mixer on both hot & cold sides and allow the water to run for approximately one minute to further flush the system.
7. Check all connections and ensure there are no leaks.

